

# POSTAL & LOGISTICS - POLLY

ST150



*The Polly has been developed as the next generation of postal / parcel distribution ideal for eFulfilment.*

Using the extensive lean and postal experience of K Hartwall, the Polly has been developed as the next generation of **postal / parcel distribution ideal for eFulfilment.**

**Two folding** stillages are transported onto a locking stackable slave pallet with the advantage of rolling off and being used as final distribution unit.

It is easy & fast to assemble, and fully stackable when folded or assembled.

The ergonomic unit features a **half drop-down gate** on each side and is ideal for merchandising operations in retail locations where space is at a premium.



3/133 South Pine Road, Brendale, QLD 4500  
Phone: +61 7 3490 9600 | Fax: +61 7 3881 0444  
Email: sales@retailquip.com

# POSTAL & LOGISTICS - POLLY

## ST150



**The Polly is a foldable** roll container optimized for manual handling operations.

Using the associated adaptor pallet, the unit can be double-stacked during transportation providing extremely high vehicle fill both outbound and reverse logistics.


**The platform allows different product streams** to be combined in a highly flexible solution resulting in major efficiency improvements in your supply chain.

**Empty units can be folded and stacked 5 times** more efficiently than rigid cages both in transit and storage.

**An added benefit** is that the adaptor pallet allows stacked Pollys to be stored at high level freeing up valuable operational space.

### Benefits:

- Easy and fast to assemble or fold: one person operation
- Fully stackable when folded or assembled
- Significantly improved vehicle cubic fill in both outbound and return logistics
- Ergonomic unit with half drop-down gates on each side
- Ideal for merchandising operations in retail locations where space is at a premium.

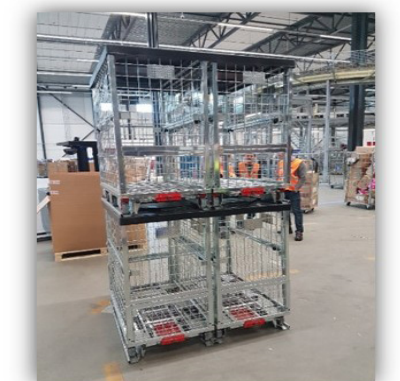

# POSTAL & LOGISTICS - POLLY

ST150



## Technical Information:

### Polly

External Dimensions:	1000mm x 600mm x 1140mm
Internal Dimensions:	962mm x 518m 972mm
Unit Tare Weight:	51kg
Finish:	Zinc electro-plated + lacquer

Safe working load:	500kg
Loaded Units (13,5m trailer)	52
Stacked Units (13,5m trailer)	260

Max Stacking (loaded on a pallet)	2 High
Max Stacking (nested)	5 High

### Castors

Size:	Ø 100mm
Type:	2 fixed, 4 swivel
Wheel tread:	CPD, PU, Sandwich or Rubber

### Adaptor Pallet

External Dimensions:	1023mm x 1203mm x 169mm
Unit Tare Weight:	46kg
Safe Working Load:	1000kg